

STAINLESS STEEL FLEXIBLE HOSE


SF100



Feature

Max. Working Temperature : 100 ° C

Structure

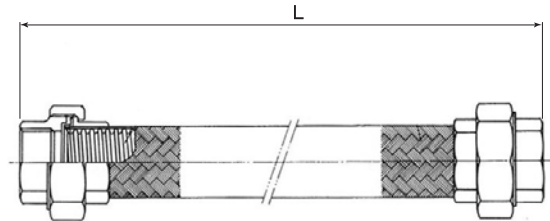

No.	Parts	Material
①	Screw	FCMB
②	Nut	FCMB
③	Gasket	Fiber
④	Tube	Stainless Steel
⑤	Braid	Stainless Steel

Dimensions and Allowable Movements

Nominal Diameter		Overall Length [mm]	Lateral Movement [mm]	Working Pressure [MPa]
[mm]	[inch]			
15	1/2	300	27	1.6
20	3/4	300	25	1.6
25	1	300	24	1.6
32	1-1/4	300	20	1.6
40	1-1/2	300	16	1.6
50	2	300	22	1.6
15	1/2	500	52	1.6
20	3/4	500	51	1.6
25	1	500	50	1.6
32	1-1/4	500	50	1.6
40	1-1/2	500	49	1.6
50	2	500	47	1.6
15	1/2	1000	117	1.6
20	3/4	1000	115	1.6
25	1	1000	114	1.6
32	1-1/4	1000	114	1.6
40	1-1/2	1000	113	1.6
50	2	1000	112	1.6

Note:

1. Other specifications are also available, please consult with us.
2. Design and specifications are subject to change without prior notice.

Note: The contents of this catalogue are subject to change without notice.

Agent : TOZEN Corporation

