

SF100


Union Type Flexible Hose



Application : Absorption of the piping strain in the line of water, steam, oil, chemicals, etc., absorption of vibration and ground sinking.

Max. Working Temperature : 220°C

CONSTRUCTION

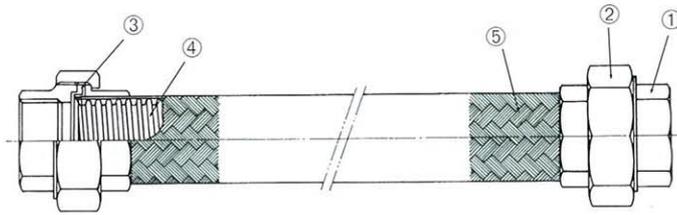

No.	Parts	Materials
①	Union Screw	FCMB / Stainless Steel
②	Union Nut	FCMB / Stainless Steel
③	Gasket	Fiber
④	Flexible Tube	Stainless Steel
⑤	Braid	Stainless Steel

SPECIFICATION

Model (Code)	Nominal Diameter {mm(inch)}	Overall Length (mm)	Lateral Movement (mm)	Working Pressure (Kgf/cm ²)
SF-100-15	15 (1/2)	300	27	16
SF-100-20	20 (3/4)	300	25	16
SF-100-25	25 (1)	300	24	16
SF-100-32	32 (1 1/4)	300	20	16
SF-100-40	40 (1 1/2)	300	16	16
SF-100-50	50 (2)	300	22	16

Remarks : Special length available on request.
Higher pressure rating is available.