
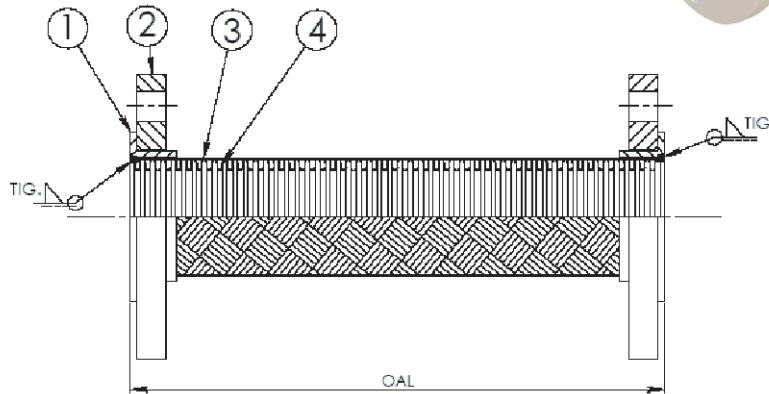


# SF-6700

## SOCKET WELDED TYPE STAINLESS STEEL FLEXIBLE HOSE

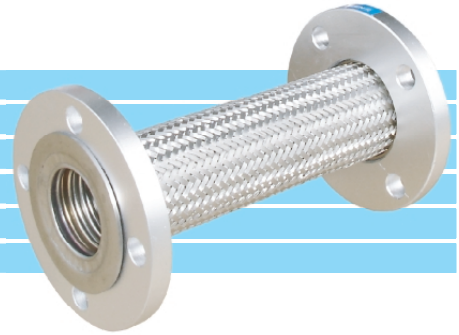

Item	Part Name	Material	Qty.
1	Lap Ring	SUS304	2
2	Standard Flange	SS400	2
3	Wire Braid	SUS304	1
4	Flexible Tube	SUS304	1

<b>Max. Working Temperature :</b>	250°C
<b>Max. Working Pressure :</b>	10 bar
<b>Bursting Pressure :</b>	40 bar
<b>Applicable Fluid :</b>	Water, Hot Water, Oil, Steam, Gas, Air, Chemicals, etc.

- All contacting fluid parts are stainless steel.
- Longer effective length enables higher lateral movement.
- Flange drillings comply with JIS10K, ANSI150, and PN10.
- Please consult us for other material, pressure, temperature and movement designs.

### ● SPECIFICATION

Size	Min. Bending Radius (mm.)	Lateral Movement			Ineffective Length (mm.)
		300mm. OAL	400mm. OAL	500mm. OAL	
15A	190	50	72	94	36
20A	200	48	71	94	36
25A	240	48	71	98	36
32A	300	41	61	82	40
40A	360	39	62	84	41
50A	450	34	55	76	41
65A	490	28	51	72	50
80A	600	23	45	66	54
100A	800	16	36	57	54

**TOZEN (THAILAND) CO., LTD.**  
 3388/62 18TH FLOOR, SIRINRAT BLDG.,  
 RAMA IV RD., BANGKOK 10110 THAILAND  
 TEL : (66) 0-2367-5721-8  
 FAX : (66) 0-2367-5729, 0-2367-5066  
 E-MAIL : sales@tozen.co.th  
 URL : www.tozen.co.th

**TOZEN CORPORATION**  
 8-4, ASAHI YOSHIKAWA  
 SAITAMA 342-008 JAPAN  
 TEL : 048-993-1030  
 FAX : 048-993-1038