

SF600


Stainless Steel Flexible Hose Flange Type Flexible Hose




Application : Water, Steam, Turbines, Gas, Fuel Oil, Air, etc.

Max. Working Temperature : 220°C

CONSTRUCTION

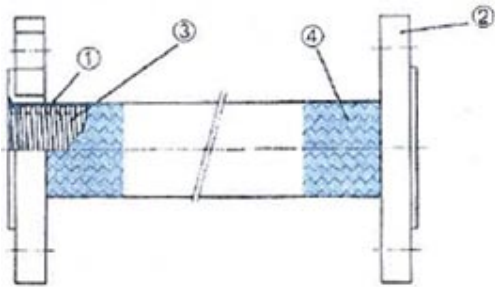

No.	Parts	Materials
①	Collar	Stainless Steel
②	Loose Flange	Carbon Steel / Stainless Steel
③	Bellow	Stainless Steel
④	Braid	Stainless Steel

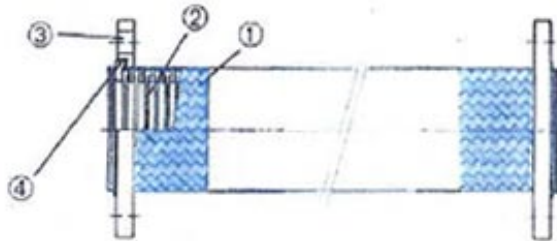

No.	Parts	Materials
①	Braid	Stainless Steel
②	Bellows	Stainless Steel
③	Loose Flange	Carbon Steel / Stainless Steel
④	Ring	Carbon Steel / Stainless Steel

SPECIFICATION

Model (Code)	Nominal Diameter {mm(inch)}	Overall Length (mm)	Lateral Movement (mm)	Working Pressure (Kgf/cm ²)
SF-600-15F	15 (1/2)	300	34.0	16
SF-600-20F	20 (3/4)	300	34.0	16
SF-600-25F	25 (1)	300	34.0	16
SF-600-32F	32 (1 ¼)	300	33.0	16
SF-600-40F	40 (1 ½)	300	32.0	16
SF-600-50F	50 (2)	300	24.0	16
SF-600-65F	65 (2 ½)	300	32.0	16
SF-600-80F	80 (3)	300	32.0	16
SF-600-100F	100 (4)	300	26.0	16
SF-600-125F	125 (5)	300	20.0	16
SF-600-150F	150 (6)	300	18.0	16
SF-600-200F	200 (8)	300	9.0	16
SF-600-250F	250 (10)	300	3.4	16
SF-600-300F	300 (12)	300	2.8	16

Remarks : Large size and different length available on request.